


KK 2020 MULTI-CHAMBER BALER

The KK 2020 Multi chamber baler saves handling time with multiple bale chambers, were the operator is able to load while other chamber compacts. Multiple chambers offer an efficient way of separating different materials before baling. It features a roller guided head for ease of movement and retaining claws to prevent spring back of material in the baler chamber. The top loading baler is suitable for area's with height restrictions and the fully automated bale ejector simplifies the removal of the bales.

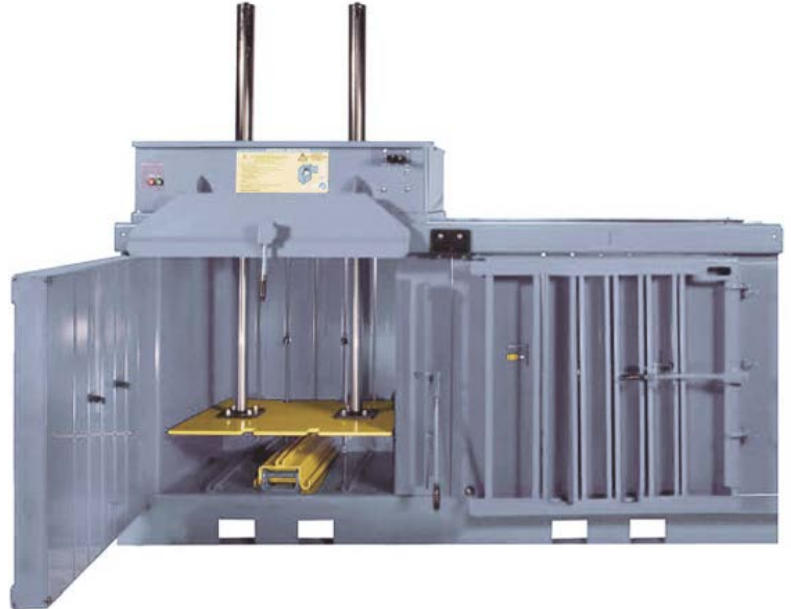

Features

Two chambers to sort card from plastic.
 Retaining claws to reduce spring back.
 Roller guided head for ease of movement.

Options

Additional chambers may be added to this baler (up to 6).
 PLC Panel with automatic compaction cycles and bale 'full' light.

SPECIFICATIONS	
Dimensions (H x W x D)	2469 x 3260 x 1269 mm
Weight	1400 kg
Transportation Ht	2469 mm
Power Supply	220 – 240 V (3 phase)
Motor	2.2 kW 16 Amp
Pressing Force	up to 16 Ton
Noise Level	74 decibels
Bale Dimensions (H x W x D)	100 x 100 x 800 mm
Weight	up to 200 kg (depending on material used)
Cycle Times	34 seconds
Loading Aperture Size (W x D)	1074 x 800 mm

*Please note specifications and product photos may vary.

